


MK側溝 3種(横断用)

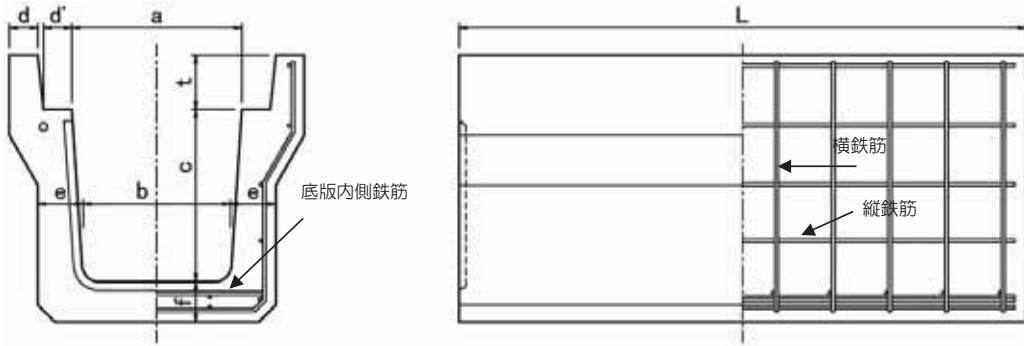

呼び	寸法 (mm)									参考重量 (kg)
	a	b	c	d	d'	e	f	t	L	
*250	250	230	250	55	55	75	75	90	1000	195
*300A	300	280	300	60	55	80	80	95	1000	243
*300B	300	270	400	60	55	90	90	95	1000	301
*300C	300	260	500	65	55	100	100	95	1000	379
*400A	400	370	400	65	55	90	90	110	1000	333
*400B	400	360	500	65	55	100	100	110	1000	403
*500A	500	460	500	70	60	100	100	125	1000	442
*500B	500	450	600	70	60	110	110	125	1000	552
*600	600	550	600	70	60	110	110	140	1000	551

許容差 (mm)	a・b・c・d・d'・e・f・t	L
	±3	±6

呼び	配筋						かぶり厚限界 (mm)	曲げ強度 荷重 (kN)	スパン L (mm)	圧縮強度 (N/mm ²)		
	横鉄筋				縦鉄筋							
	外側鉄筋		底板内側鉄筋									
	径 (mm)	数量 (本)	径 (mm)	数量 (本)	径 (mm)	数量 (本)					最小	最大
*250	D10	8	D6	8	D6	12	37	48	250	30以上		
*300A		10		10			40	47				
*300B		12		12			45	62				
*300C		14		14			17	50	79		300	
*400A		13		13			17	45	47			400
*400B		15		15			19	50	60			
*500A		15		15			20	50	48		500	
*500B		17		17			24	55	60			
*600		18		18			25	55	50			600

MK側溝 3種は JIS A 5372 (2004) 推奨仕様 5-3 落ちふた式U形側溝 規格外 (すべて組合独自規格)