



MK側溝 蓋
2種蓋(車道用)

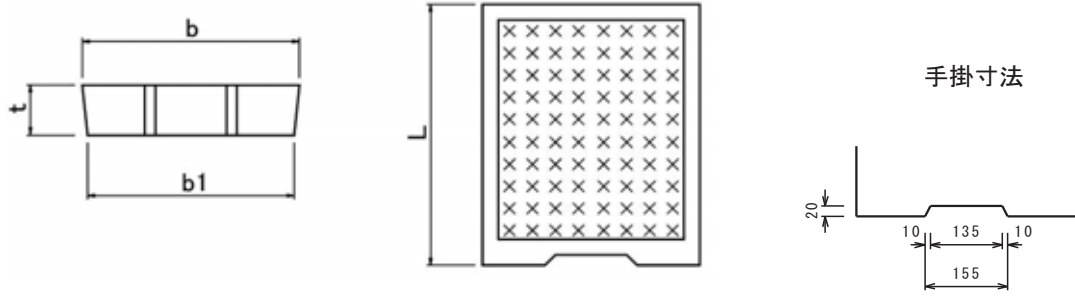

3種蓋(横断用)

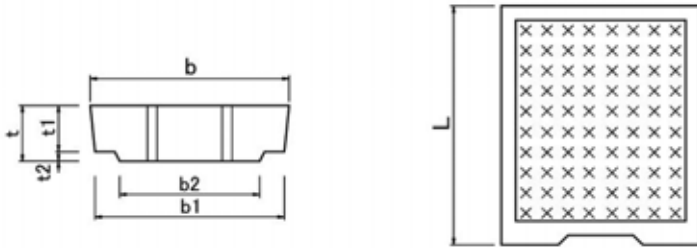

種類	呼び	寸法 (mm)							参考重量 (kg)
		b	b ₁	b ₂	t	t ₁	t ₂	L	
2種 車道用	250	362	352	—	90	—	—	500	38
	300	412	402	—	95	—	—	500	46
	400	512	502	—	110	—	—	500	66
	500	622	612	—	125	—	—	500	92
	*600	722	712	—	140	—	—	500	120
3種 横断用	*250	362	352	240	110	90	20	500	43
	*300	412	402	290	115	95	20	500	52
	*400	512	502	390	130	110	20	500	75
	*500	622	612	490	145	125	20	500	104
	*600	722	712	590	160	140	20	500	133

許容差 (mm)	b · t · L
	±3

種類	呼び	配筋				かぶり厚限界		曲げ強度 荷重 (kN)	スパン L (mm)	圧縮強度 (N/mm ²)
		横鉄筋		縦鉄筋		(mm)				
		径 (mm)	数量 (本)	径 (mm)	数量 (本)	最小	最大			
2種 車道用	250	D6	6	φ4	3	12	45	28	300	27以上
	300	D10	4	D6	4		47	27	350	
	400		5		5		55	28	450	
	500		6		6		62	30	560	
	*600		6		6		70	35	660	
3種 横断用	*250		D10		6	D10	3	13	55	41
	*300	5	3	57	39		350			
	*400	5	4	65	39		450			
	*500	6	5	72	39		560			
	*600	6	6	80	43		660			

JIS A 5372 (2004) 推奨仕様 5-3 落ちふた式U形側溝準拠 (*印は組合独自規格)